

SILVAPERL PERLITE P05 MICRONISED

NON-COMBUSTIBLE ULTRA-LIGHTWEIGHT MINERAL AGGREGATE
WITH EXCELLENT INSULATION & ADSORPTION PROPERTIES

CHEMICAL PROPERTIES

Perlite is an aluminosilicate glass.

TYPICAL CHEMICAL COMPOSITION:

Silicon as SiO ₂	73%
Aluminium as Al ₂ O ₃	15%
Iron as Fe ₂ O ₃	2%
Sodium as Na ₂ O	3%
Potassium as K ₂ O	5%
Calcium as CaO + Magnesium as MgO	1%
Others	1%
Organic Matter	nil
Moisture Content (when packed)	less than 0.8%

PHYSICAL PROPERTIES:


Refractive Index	1.5
Free Moisture (max)	< 0.50%
pH of Water Slurry	6.5 - 7.5
Softening Point	890 – 1100 °C
Fusion Point	1280 – 1350 °C
Specific Heat	837 J kg ⁻¹ K ⁻¹
Thermal Conductivity (loose poured)	0.05 W m ⁻¹ K ⁻¹
Bulk Density (compacted when packed)	150 - 190 kg m ⁻³

TYPICAL GRADING

SIEVE SIZE (MM)	WEIGHT PASSING (%)
0.300	95 - 100
0.150	75 - 95
0.075	45 - 65
0.045	20 - 35

APPLICATIONS

- Paint, grout and general fillers
- Textured coatings
- Lightweight plasters and renders
- Animal and poultry feeds
- Anti-caking additive
- Drying agent
- Refractory applications
- Fireproofing compounds
- Artificial stone

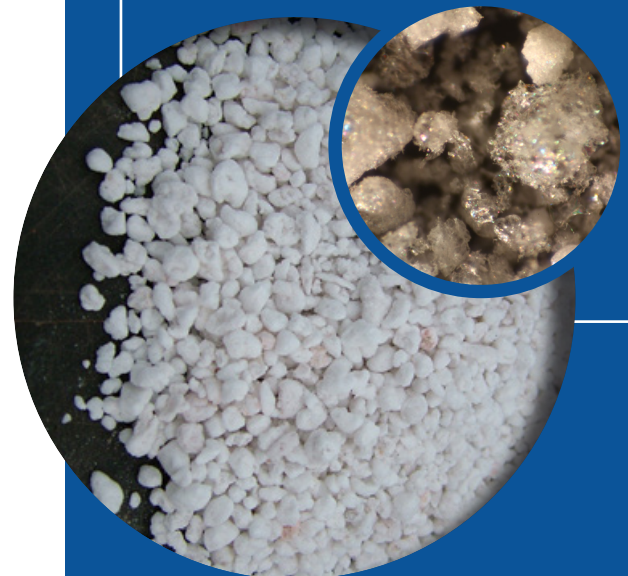

www.SILVAPERL.COM

Sales Enquiries +44 1782 383000

HOBEN
INTERNATIONAL LTD

Brassington Works, Brassington, Matlock, Derbyshire, DE4 4HF, United Kingdom
Tel +44 (0)1629 540201 Email sales@hobeninternational.com

WWW.SILVAPERL.COM